


REV. C - SIC - 7/1/2020 - UPDATED ANNOTATIONS; UPDATED WEIGHT RATING NOTE; ADDED SOIL BEARING PRESSURES - 26" -GALV. STEEL TOP RAILS 10" TYP

> Ø 1/2"-13 UNC LIFTING INSERT (4X)

> > 7/8"



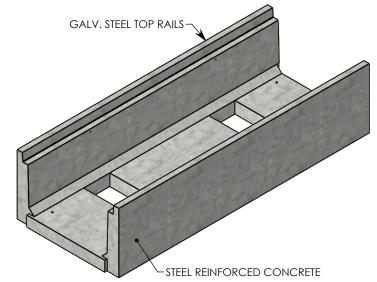

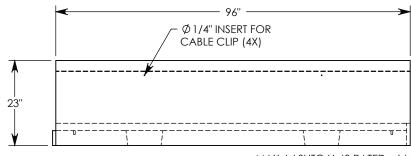

NOTE 1: FOR NON-STANDARD LENGTHS THE CHANNEL WILL BE SOLID BOTTOM AND DESIGNATED WITH ITS CORRESPONDING LENGTH MEASUREMENT. IE: 803016HT3 72"

CONCRETE

MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,000 PSF; H-20: 3,000 PSF

DRAWN BY: ROSS LAGER

2290 LBS.

3/21/2011 REVISION LEVEL: C **CREATED DATE:** 7/1/2020 SAVED DATE: SAVED BY: scallahan **WEIGHT: MATERIAL:**

1010 NORTH STAR DRIVE P.O. BOX 69 ZUMBROTA, MN 55992-0069

DESCRIPTION:

HEAVY TRAFFIC CHANNEL

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

883016HT3