


REV. B - SIC - 8/21/2020 - UPDATED ANNOTATIONS; UPDATED WEIGHT RATING NOTE; ADDED SOIL BEARING PRESSURES

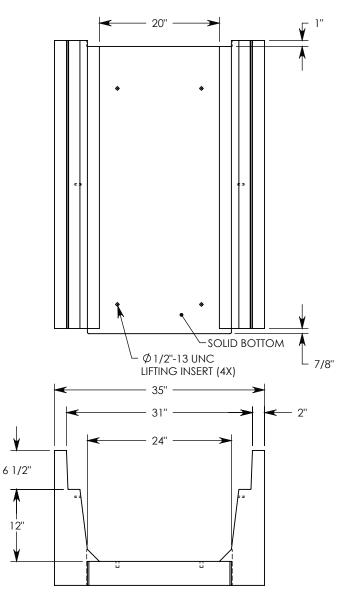

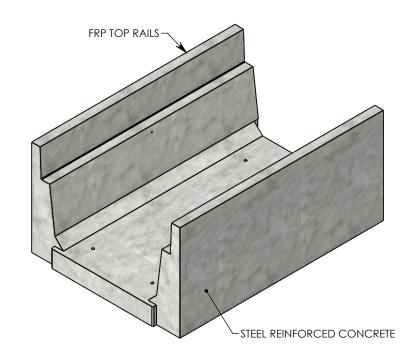

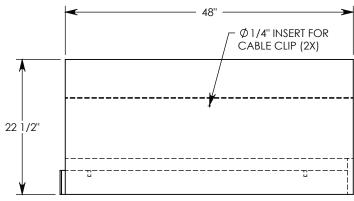

NOTE 1: FOR NON-STANDARD LENGTHS THE CHANNEL WILL BE SOLID BOTTOM AND DESIGNATED WITH ITS CORRESPONDING LENGTH MEASUREMENT. IE: HT6F2412 32"

MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,000 PSF; H-20: 3,000 PSF

DRAWN BY: ROBIN FLINT CREATED DATE: 4/1/2011 REVISION LEVEL: B SAVED DATE: 8/21/2020 SAVED BY: SCAllahan WEIGHT: MATERIAL: 1143 LBS. CONCRETE



HEAVY TRAFFIC CHANNEL		
DIMENSIONS ARE IN INCHES	CONTACT INFORMATION:	Ī
TOLERANCES:	FMAIL: INFO@CONCASTING COM	l

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2° CONTACT INFORMATION:
MAIL: INFO@CONCASTINC.CO/
PHONE: (507) 732-4095
FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

DESCRIPTION:

HT6F2412SB 48"