
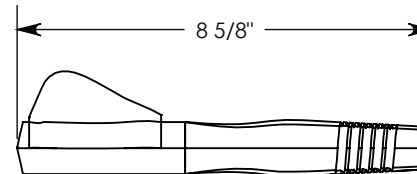


COPOLYMER POLYPROPYLENE WITH  
 $\varnothing 1/2$  ASTM A 615 GRADE 60  
 STEEL REINFORCEMENT BAR ON CENTER

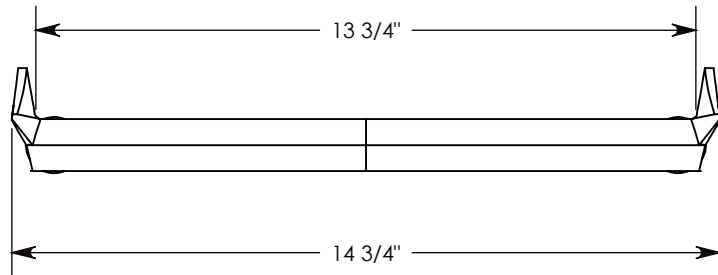

**PREFORMED HOLE REQUIREMENTS:**  
 (2)  $\varnothing 1.1$  HOLES TAPERING TO  $\varnothing 7/8$ " TO 3-1/2" DEPTH  
 HOLES MUST BE PARALLEL

**DRILLED HOLE REQUIREMENTS:**  
 (2)  $\varnothing 1$ " HOLES DRILLED TO 3-3/4" MIN DEPTH  
 HOLES MUST BE PARALLEL  
 USE A 1" MASONRY DRILL BIT

THIS STEP MEETS OR EXCEEDS ASTM C 478 AND OSHA STANDARDS WHEN PROPERLY INSTALLED.

**DRAWN BY: ROBIN FLINT**

**DATE: 6/29/2015**

**REVISION LEVEL: 0**

**WEIGHT:**

**2.5 LBS.**

**MATERIAL:**

**NOTED**



1010 NORTH STAR DRIVE  
 P.O. BOX 69  
 ZUMBROTA, MN 55992-0069

**DESCRIPTION:**

**POLYPROPYLENE STEP**

DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL:  $\pm 1/8$ "  
 ANGULAR:  $\pm 2^\circ$

CONTACT INFORMATION:  
 EMAIL: INFO@CONCASTINC.COM  
 PHONE: (507) 732-4095  
 FAX: (507) 732-4094

SHEET 1 OF 1

**PART NUMBER:**

**STP-1**