
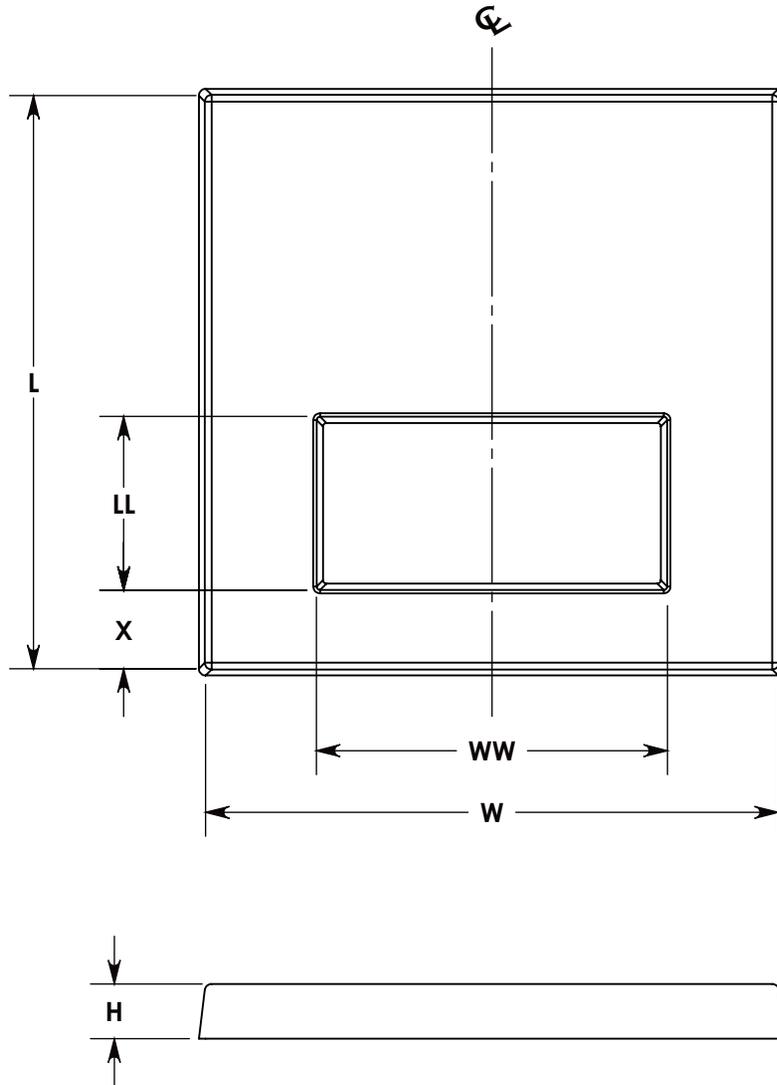


PRINT AND MARK-UP THIS DRAWING WHEN ORDERING CUSTOM FLAT PADS

FIBERCRETE®

FIBER & WIRE
REINFORCED
CONCRETE

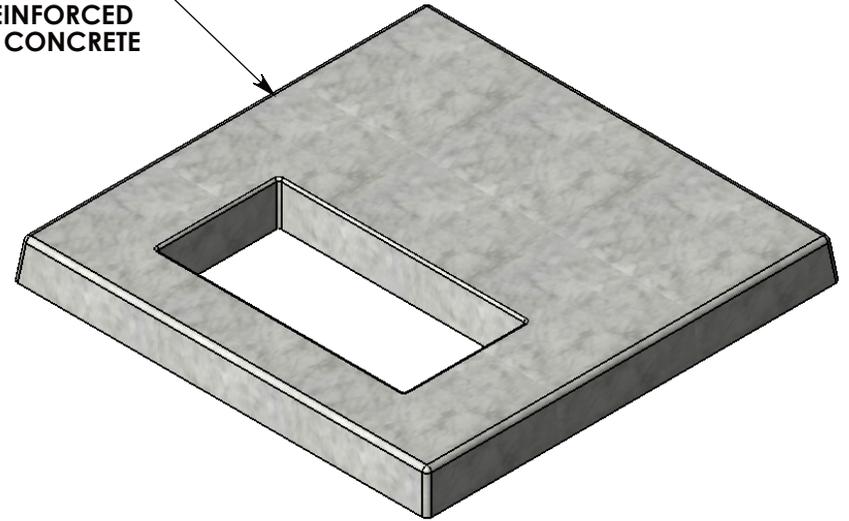

PRINT THIS PAGE AND FILL IN THE DIMENSIONS
OF THE CUSTOM SIZE FLAT PAD NEEDED

W - ___ L - ___ H - ___ WW - ___ LL - ___ X - ___

PART NUMBERING CONVENTION: FP-W-L-H (WWLL)X
WIDTH & LENGTH ARE INTERCHANGEABLE; THE SMALLEST
DIMENSION IS ALWAYS LISTED FIRST.

PLEASE NOTE THAT TYPICALLY THE OPENING OR
THROAT IS CENTERED ON THE "W" DIMENSION.
IF AN OFFSET OPENING IS REQUIRED, SPECIFY
BY ADDING A DIMENSION OFF OF THE EDGE.
IF MULTIPLE OPENINGS ARE NEEDED, DRAW IN
THEIR LOCATIONS ON THE TOP VIEW OF THE PRINT.

SKETCH IN ANY CAST-IN HARDWARE REQUIRED

___ - CHECK IF SOLID-BOTTOM PAD IS REQUIRED

___ - QTY REQUIRED

DRAWN BY: ROBIN FLINT

DATE: 4/10/2014

REVISION LEVEL: 0

WEIGHT:

-- LBS.

MATERIAL:

FIBERCRETE FC



1010 NORTH STAR DRIVE
P.O. BOX 69
ZUMBROTA, MN 55992-0069

DESCRIPTION:

GENERIC FIBERCRETE FLAT PAD

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ± 1/8"
ANGULAR: ± 2°

CONTACT INFORMATION:
EMAIL: INFO@CONCASTINC.COM
PHONE: (507) 732-4095
FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

FP-___ - ___ - ___