





GALV. STEEL, SPRING ASSISTED,  
HINGED COVER (2X)  
P/N: 72-32-SPA1 ~347 LBS

REMOVABLE COVER  
P/N: 72-32-RSG ~336 LBS

HEX BOLTS INCLUDED  
P/N: HHB.38-1.5 (6X)

BOLT DOWN FRAME  
P/N: 72-96-FRM-SPA ~224 LBS

ALUM ID PLATE  
"CONCAST"  
P/N: LTR-ID

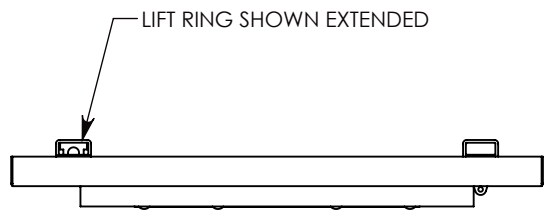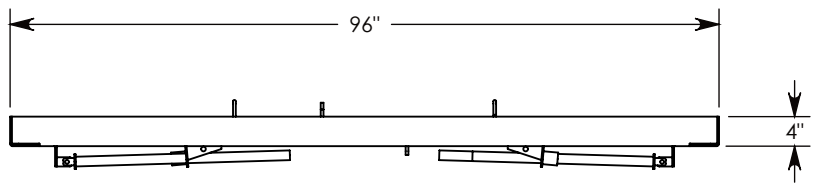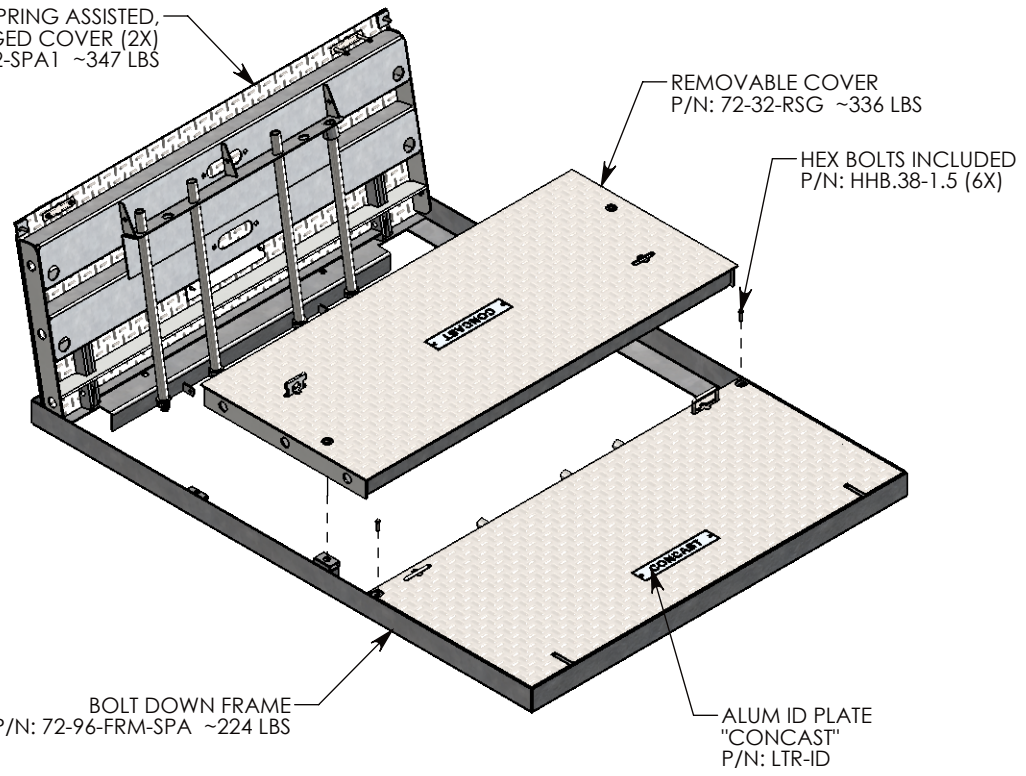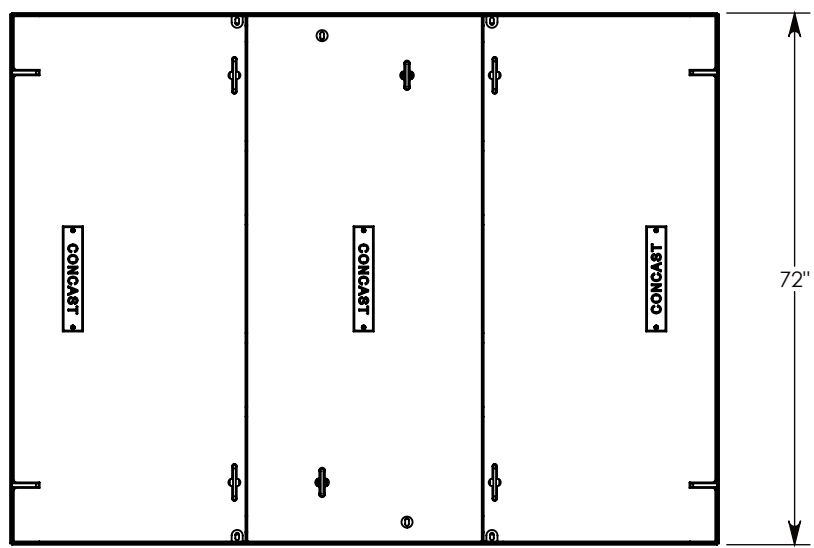

**NOTE 1:** FOR ADDED SECURITY, PENTA HEAD (P/N: PTA.38-1.5) OR SURELOCK BOLTS (P/N: SL.38-1.25) CAN BE ADDED

AASHTO H-20 RATED – 32,000 LB. SINGLE AXLE LOAD

DRAWN BY: <b>JESSE GUTTING</b>	
CREATED DATE: <b>10/1/2020</b>	REVISION LEVEL: <b>0</b>
SAVED DATE: <b>10/1/2020</b>	SAVED BY: <b>jgutting</b>
WEIGHT: <b>1293 LBS.</b>	MATERIAL: <b>NOTED</b>



**CONCAST**  
1010 NORTH STAR DRIVE  
P.O. BOX 69  
ZUMBROTA, MN 55992-0069

DESCRIPTION: <b>SG SPRING-ASSISTED COVER</b>		SHEET 1 OF 1
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°	CONTACT INFORMATION: EMAIL: <a href="mailto:INFO@CONCASTINC.COM">INFO@CONCASTINC.COM</a> PHONE: (507) 732-4095 FAX: (507) 732-4094	
PART NUMBER: <b>72-96-SPA</b>		