



**FIBERCRETE<sup>®</sup>**  
**TRENCH**  
**SYSTEM**

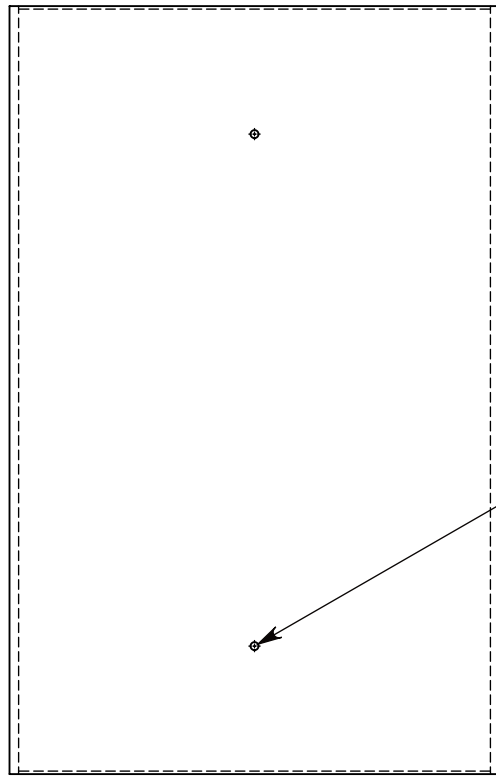


Ø 1/2"-13 UNC  
 LIFTING INSERTS (2X)


STEEL REINFORCED CONCRETE

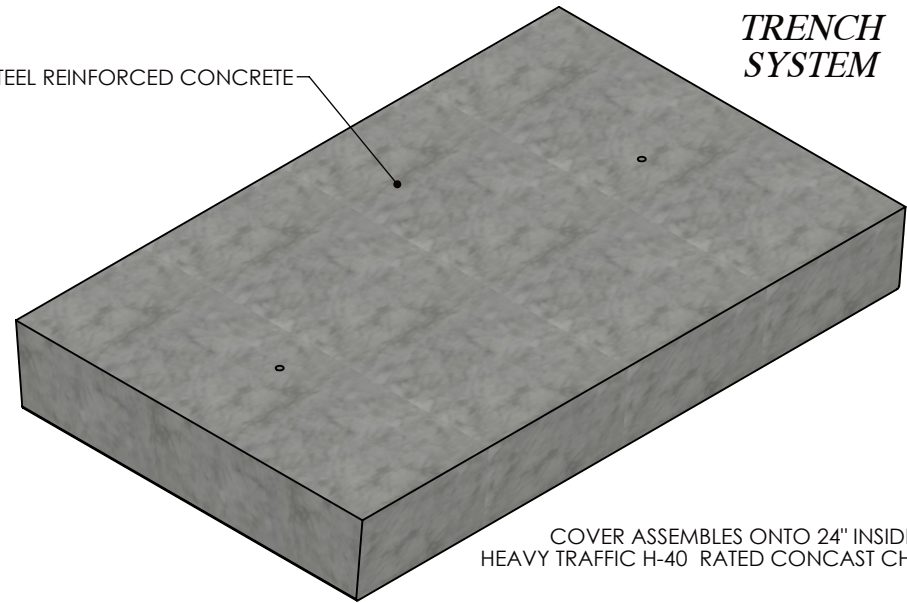

COVER ASSEMBLES ONTO 24" INSIDE WIDTH  
 HEAVY TRAFFIC H-40 RATED CONCAST CHANNEL.

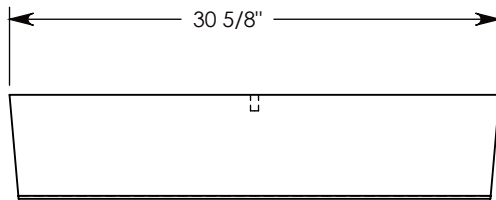

30 5/8"

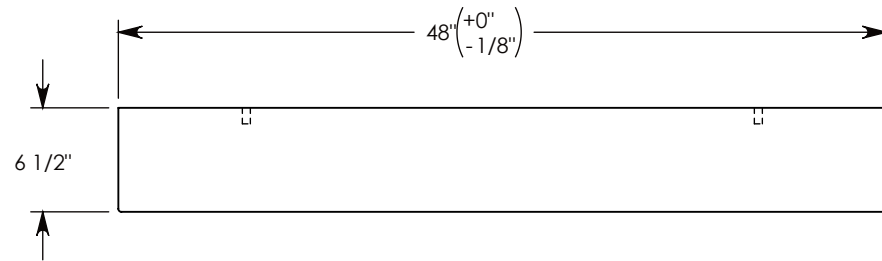

48<sup>(+0"</sup>  
<sup>-1/8")</sup>

6 1/2"

NOTE: FOR NON-STANDARD LENGTHS, THE PART NUMBER WILL  
 CORRESPOND TO IT'S MEASURED LENGTH. IE: 8025HT 18"

H-40 RATED - 64,000 LB. PER AXLE LOAD.

**DRAWN BY: ROBIN FLINT**

**DATE: 4/4/2016**

**REVISION LEVEL: 0**

**WEIGHT:**

**768 LBS.**

**MATERIAL:**

**CONCRETE**

**CONCAST**  
 1010 NORTH STAR DRIVE  
 P.O. BOX 69  
 ZUMBROTA, MN 55992-0069

**DESCRIPTION:**

**HEAVY TRAFFIC COVER**

DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL: ± 1/8"  
 ANGULAR: ± 2°

CONTACT INFORMATION:  
 EMAIL: INFO@CONCASTINC.COM  
 PHONE: (507) 732-4095  
 FAX: (507) 732-4094

SHEET 1 OF 1

**PART NUMBER:**

**8025HT**