



REV. A - SIC - 8/13/2020 - UPDATED ANNOTATIONS; UPDATED WEIGHT RATING NOTE; ADDED SOIL BEARING PRESSURES; 1/4" CABLE CLIP INSERT QTY: 1, WAS QTY: 2; 1/2"-13 UNC LIFTING INSERT QTY: 4, WAS QTY: 3

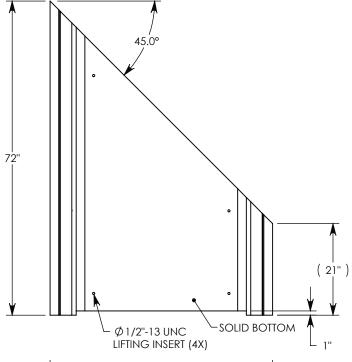



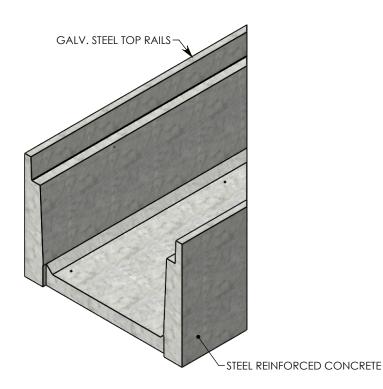

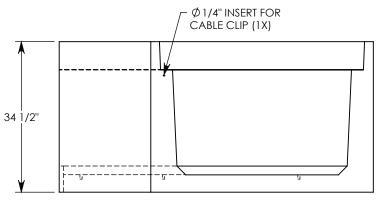

AASHTO H-20 RATED - 32,000 LB. SINGLE AXLE LOAD MINIMUM ALLOWABLE SOIL BEARING PRESSURE – 3,000 PSF

DRAWN BY:	R	\cap	R	IN	FL	IN	IT

CREATED DATE: 3/21/2011 REVISION LEVEL: A
SAVED DATE: 8/13/2020 SAVED BY: scallahan

WEIGHT: MATERIAL:

1897 LBS. CONCRETE



1010 NORTH STAR DRIVE P.O. BOX 69 ZUMBROTA, MN 55992-0069

DESCRIPTION:

HT CHANNEL; 45 DEG. ANGLE

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ± 1/8"
ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

804024HT 45R