


Ø 1/2"-13 UNC INSERTS FOR LIFTING (4X)
LOCATIONS MAY VARY

SPRING NUT (2X)


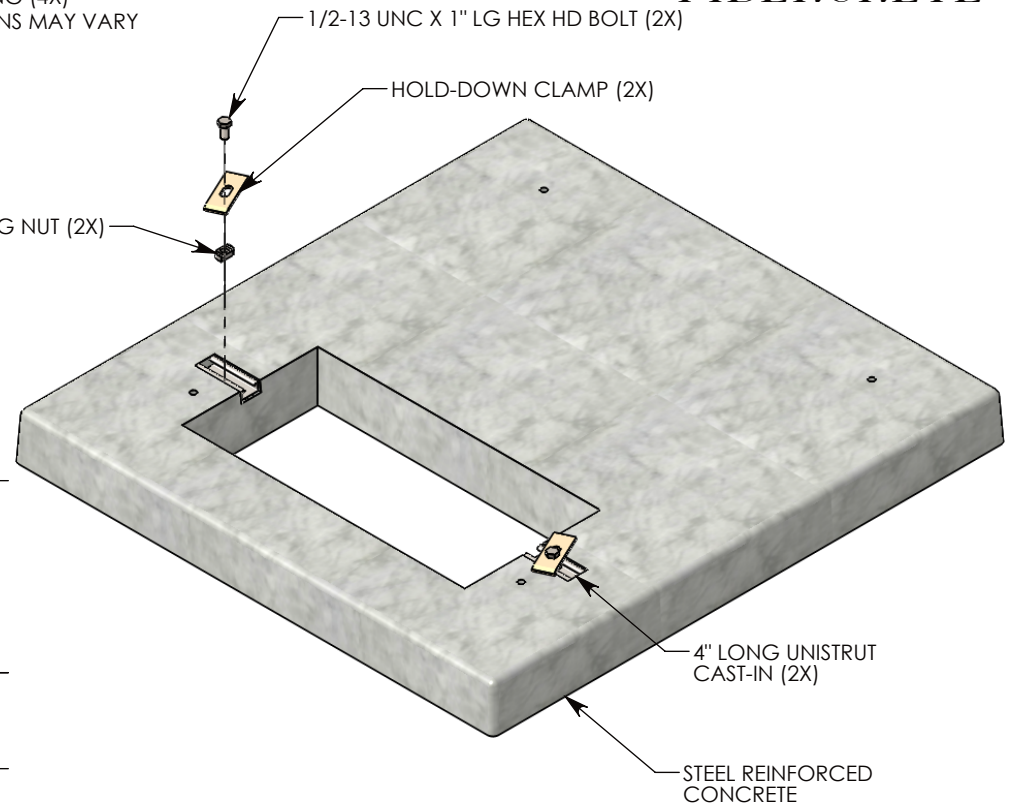


1/2-13 UNC X 1" LG HEX HD BOLT (2X)

HOLD-DOWN CLAMP (2X)

4" LONG UNISTRUT CAST-IN (2X)

STEEL REINFORCED CONCRETE

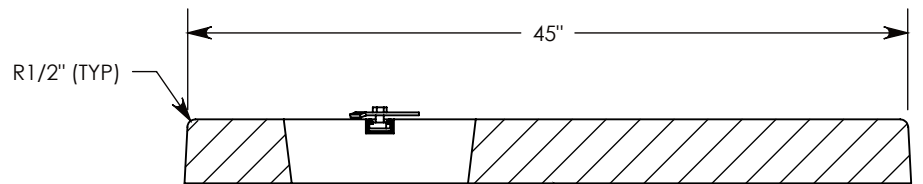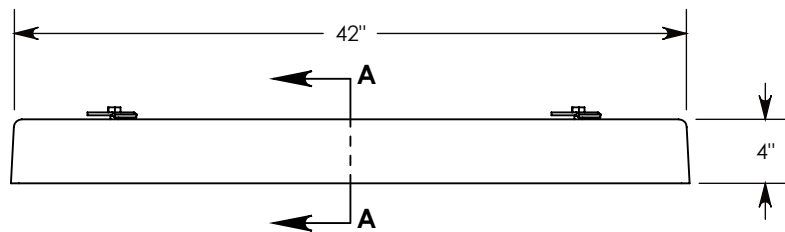

SECTION A-A

7,500 PSI CONCRETE
ALL VERTICAL SURFACES HAVE A 5 TO 7 DEGREE DRAFT.
IF SPECIFIC INSERTS OR MOUNTING HARDWARE ARE REQUIRED, PLEASE SPECIFY WHEN ORDERING.

DRAWN BY: ROBIN FLINT

DATE: 7/7/2014

REVISION LEVEL: 0

WEIGHT:

533 LBS.

MATERIAL:

CONCRETE



1010 NORTH STAR DRIVE
P.O. BOX 69
ZUMBROTA, MN 55992-0069

DESCRIPTION:

CONCRETE FLAT PAD

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ± 1/8"
ANGULAR: ± 2°

CONTACT INFORMATION:
EMAIL: INFO@CONCASTINC.COM
PHONE: (507) 732-4095
FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

FPS-42-45-4-2512 (6)