


REV. B - SIC - 8/24/2020 - UPDATED ANNOTATION; UPDATED WEIGHT RATING NOTE; ADDED SOIL BEARING PRESSURES

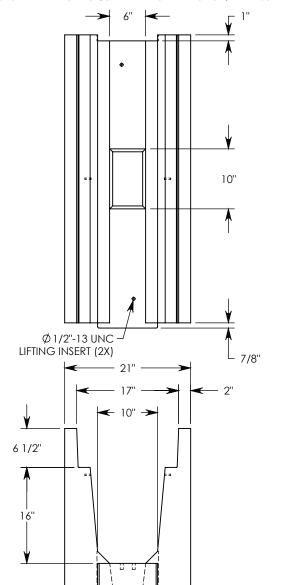



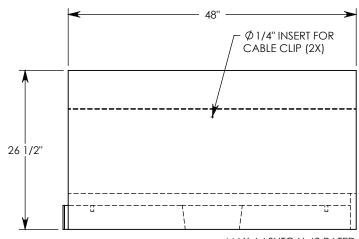

**NOTE 1:** FOR NON-STANDARD LENGTHS THE CHANNEL WILL BE SOLID BOTTOM AND DESIGNATED WITH ITS CORRESPONDING LENGTH MEASUREMENT. IE: HT6F1016 32"

MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 5,500 PSF; H-20: 3,000 PSF

## DRAWN BY: ROBIN FLINT

4/1/2011 REVISION LEVEL: B **CREATED DATE:** 8/24/2020 SAVED DATE: SAVED BY: scallahan

**WEIGHT: MATERIAL:** 

**CONCRETE** 1060 LBS.



## **HEAVY TRAFFIC CHANNEL**

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

**DESCRIPTION:** 

HT6F1016 48"