


CON-DUCT TERMINATIONS ARE CAST INTO BOX SIDEWALLS. 16 PER SIDE THEY FIT UP TO 6\"/>

Ø 1/2\"/>

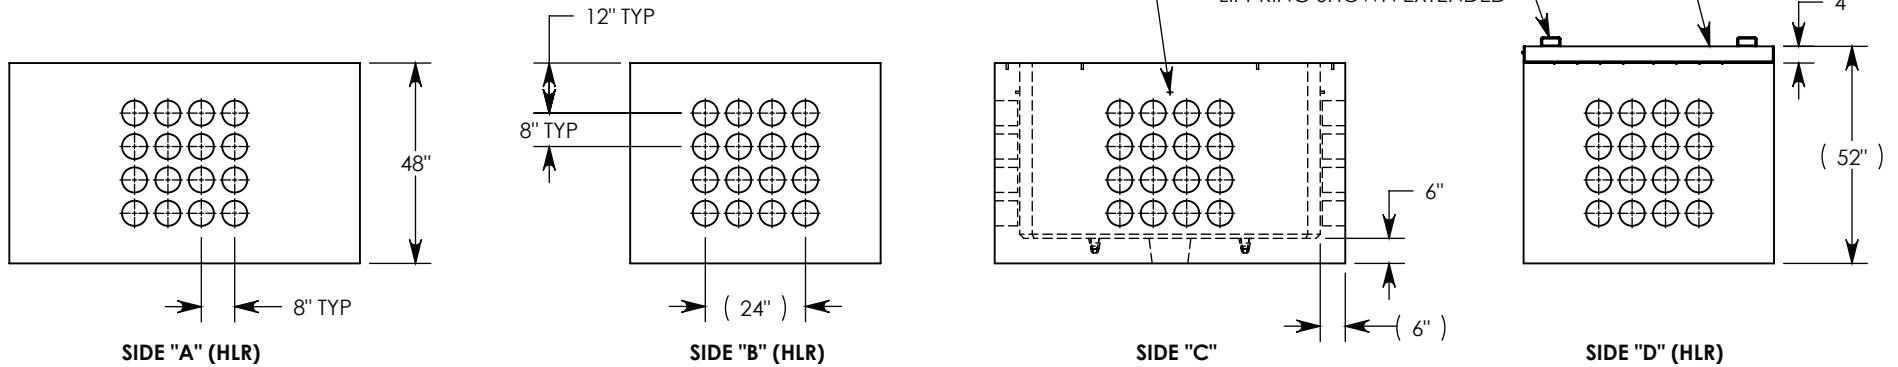

NOTE 1: FOR ADDED SECURITY, PENTA HEAD (P/N: PTA.38-2.5) OR SURELOCK BOLTS (P/N: SL.38-2.5) CAN BE ADDED

AASHTO H-20 RATED – 32,000 LB. SINGLE AXLE LOAD

| | |
|----------------------------------|---------------------------|
| DRAWN BY: SAMUEL CALLAHAN | |
| CREATED DATE: 6/7/2019 | REVISION LEVEL: A |
| SAVED DATE: 9/3/2020 | SAVED BY: jgutting |
| WEIGHT: 8029 LBS. | MATERIAL: NOTED |



1010 NORTH STAR DRIVE
P.O. BOX 69
ZUMBROTA, MN 55992-0069

| | | |
|--|---|--------------|
| DESCRIPTION: CONCRETE PULL BOX W/ SPA COVER | | SHEET 1 OF 1 |
| DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2° | CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094 | |
| PART NUMBER: PB166-60-84-48-SPA | | |