



1/2-13 UNC X 1.5" LG HEX HD BOLT (6X)
 P/N: HHB.5-1.5

3/8" STD WASHER - 1" OD (6X)
 P/N: WSR.38-1G8

BOLT DOWN GALV. STEEL FRAME
 ~ 175 LBS.
 P/N: 50-114-FRM

CONCRETE PULL BOX
 ~8786 LBS
 P/N: PB9-50-114-48

CON-DUCT TERMINATIONS ARE CAST INTO BOX SIDEWALLS. SETS OF 9 ON EACH SIDE. THEY FIT UP TO 4" PVC PIPE. TO ACCESS THE HOLES, BREAK THE PLASTIC SEAL

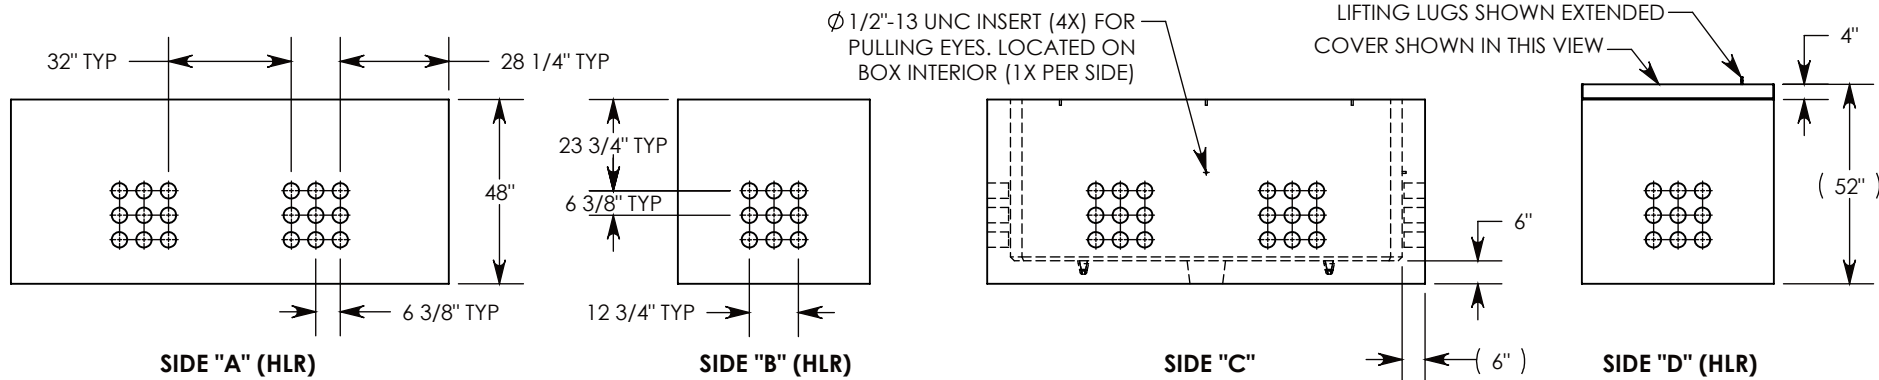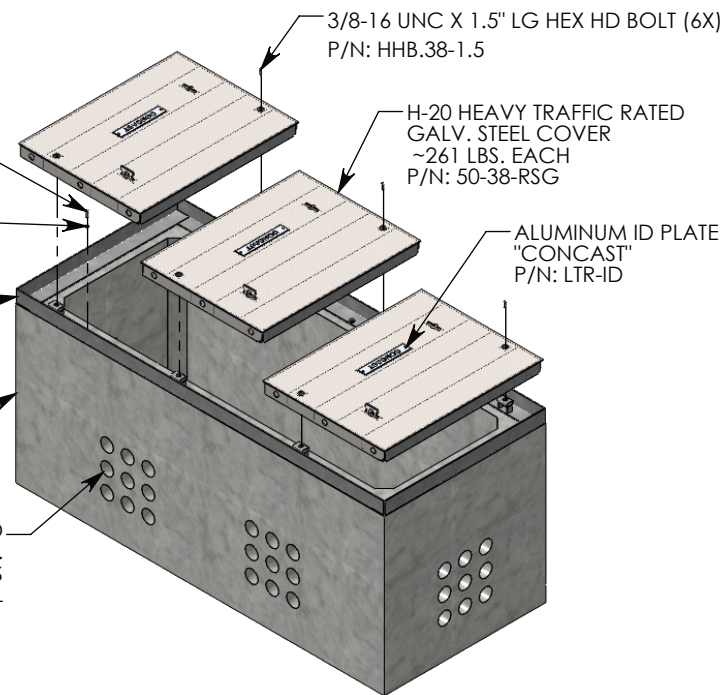

NOTE 1: FOR PVC SIZES SMALLER THAN 4", USE CONCAST RC41 (REDUCING COUPLER)

NOTE 2: FOR ADDED SECURITY, PENTA HEAD (P/N: PTA.38-1.5) OR SURELOCK BOLTS (P/N: SL.38-1.5) CAN BE ADDED

AASHTO H-20 RATED - 32,000 LB. SINGLE AXLE LOAD

DRAWN BY: ROBIN FLINT

CREATED DATE: 6/24/2011 REVISION LEVEL: D
 SAVED DATE: 9/10/2021 SAVED BY: scallahan

WEIGHT: 9745 LBS. MATERIAL: NOTED



DESCRIPTION:
CONCRETE PULL BOX W/ RSG COVERS

| | | |
|--|--|--------------|
| DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2° | CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094 | SHEET 1 OF 1 |
|--|--|--------------|

PART NUMBER:
PB9-50-114-48-RSG