


REV. A - SIC - 7/17/2020 - UPDATED WEIGHT RATING NOTE; ADDED SOIL BEARING PRESSURES

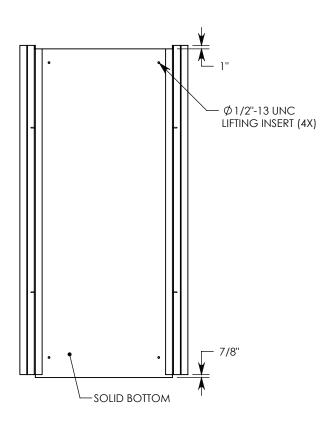

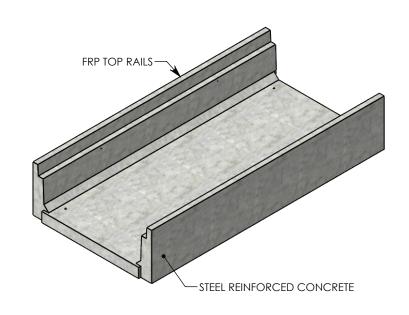



96"

Ø 1/4" INSERT FOR
CABLE CLIPS (4X)

NOTE 1: FOR NON-STANDARD LENGTHS THE CHANNEL WILL BE SOLID BOTTOM AND DESIGNATED WITH ITS CORRESPONDING LENGTH MEASUREMENT. IE: HT4F4012 36"

MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,000 PSF; H-20: 3,000 PSF

DRAWN BY: SAMUEL CALLAHAN

CREATED DATE: 8/14/2019 REVISION LEVEL: A
SAVED DATE: 7/17/2020 SAVED BY: scallahan

WEIGHT:

2460 LBS.

MATERIAL: CONCRETE



DESCRIPTION: HEAVY TRAFFIC CHANNEL

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ± 1/8"
ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

HT4F4012SB